

Reliable and easy to use re-enterable electrical insulation solutions for outdoor connections.





# Outdoor Electrical Connections


- Available as bi-component bags or new Easy 250 cartridge dispenser
- Used to waterproof an electrical connection
- Waterproofing tested according to IEC60529 in appropriate cable accessories
- Excellent for outdoor electrical applications including connections for swimming pools, lighting, irrigation, intercom and gate systems.
- Continuous operating temperature of the resin at 90 °C, emergencies up to 130 °C.
- Quick re-power of the electrical connection
- Resin compatible with most materials
- Easy accessibility to the cable connection on re-entry
- ▶ Halogen, silicone and isocyanate free
- Low voltage insulation (0.6/1kV)
- Bonds to itself

### IP68 Solution

Resin has excellent dielectric and thermal properties

### 3M<sup>™</sup> Scotchcast<sup>™</sup> Easy Dispenser 250

New



- Uses a static mixer to deliver resin
- Dispenser compatible with commercially available application guns.
- Enables accurate delivery of resin to connection.
- Basic bi-component bags also available in various sizes.





Bi-component bags for quick box filling





New Easy 250 dispenser for accurate resin dispensing





Soft and flexible resin, easy to re-enter




Types of Boxes			Easy 250	Bi-Component Bags		
Form	Dimension (mm)	Volume (ml)	N° Dispensers	Volume (ml)	Nº Bags	Bag Type
	Ø 70 - H : 40	110	1	90	1	A
	Ø 80 - H : 45	175	1		2	
-	65 × 65 × 40	170	1		2	
	80 × 80 × 40	250	1	- 292	1	· E
	105 × 105 × 50	500	2		2	
	155 × 110 × 70	1250	5	385	3	С
	180 × 140 × 86	2000	8	659	3	D
	220 × 170 × 86	3250	13	659	5	

#### 3M<sup>™</sup> Direct Bury Closure Kit DBC Series

Re-enterable Gelbox

- Pre-filled silicone gelboxes provide quick and safe electrical installation.
- Easy to connect with provided premium connector block.
- Excellent watertight sealing
- Ideal for use on small cable cross section (0.6/1kV) in high humidity environment such as outdoor electrical lighting and garden landscape applications.
- Ready for power immediately after closing the box
- 3M Direct Bury Closure boxes offer high mechanical protection from external forces.

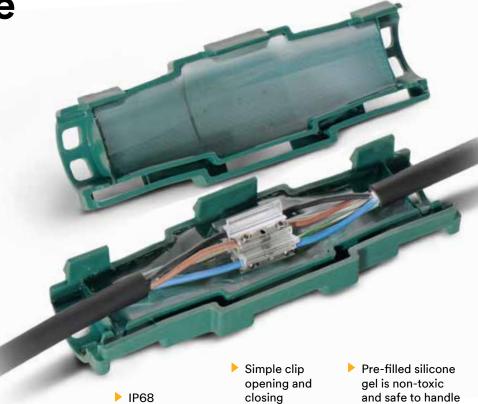

- Gel filled splicing kit with electrical connectors.
- Closure tested according to EN 50393 standard.
- Phase spacer included for accurate connector positioning.
- Can be used in a vertical and horizontal position.
- UV resistant closure
- No shelf life to product



DBC-2C connector  $5 \times 1,5$  -  $6 \text{ mm}^2$ , mono and multi cable wire, rigid and stranded



DBC-3C connector 5 × 2,5 -16 mm², mono and multi cable wire, rigid and stranded

	3M Order Code	Reference	Dimensions	Cable Formation and Conductor Cross Section
3M <sup>™</sup> Direct Bury	KE235126155	DBC-2C	180 × 60 mm	5 × 1,5 - 5 × 6 mm <sup>2</sup>
Closure Kit - DBC Series	KE235126163	DBC-3C	210 × 65 mm	5 × 2,5 - 5 × 16 mm <sup>2</sup>
	3M Order Code	Reference	Size	
3M™ Scotchcast™ 8882 Electrical Re-enterable Resin	UU001577251	Easy 250	250 mL (1x 250 mL)	
	UU003021522	8882 Size A	180 mL (2x 90 mL)	
	UU003021548	8882 Size E	292 mL (1x 292 mL)	
	UU003021514	8882 Size C	385 mL (1x 385 mL)	
	UU003021530	8882 Size D	659 mL (1x 659 mL)	

## Are you insulating, sealing, protecting or connecting?

Call BOR ENERJİ Helpline



**9** 444 3 168

**3M Electrical Products.** Use the right stuff.



3M Australia Pty Ltd **Electrical Markets Division** Bldg A, 1 Rivett Road North Ryde NSW 2113

Phone 1800 3M ELEC

Email 3msafetyaucs@mmm.com www.3M.com.au/electrical Web

3M New Zealand Ltd **Electrical Markets Division** 94 Apollo Drive, Rosedale Auckland 0632

Phone 0800 474 787 Email 3mnzitb@mmm.com www.3M.co.nz/electrical Web



Zümrütevler Mh. Karayemiş Sk., REF PLAZA No:26 Kat:2 D:3 MALTEPE/İSTANBUL Telefon: 444 3 168

E-Posta: info@borenerji.com